


# LOW PROFILE COBRA® TIES

- Eliminates Snags & Abrasions
- Reduced Head Height
- Tamper Proof Pawl
- Rounded Edges
- UL, CSA Approved
- Mil-Spec Certified
- RoHS Compliant



Available in sizes:  
7"-50 lb to 14"-120 lb  
UV Black and Natural Nylon

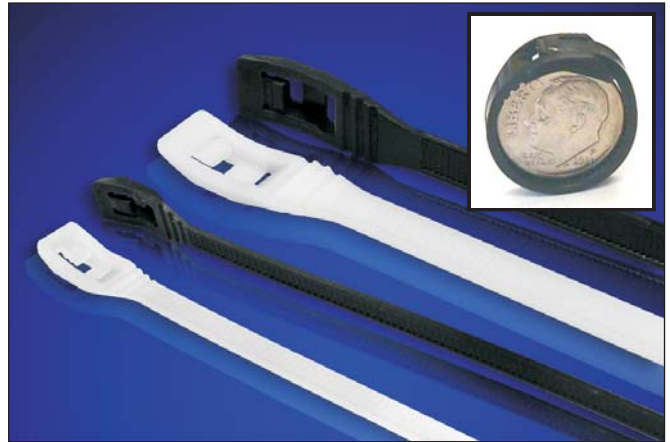

Pawl support is required to obtain optimum tensile strength.

Flexible head design provides maximum strength while the head easily flexes around the circumference of the tubing or bundled wires.

### Ideal Applications:

Wire Harnesses, Confined Spaces, Hoses, Marine, Playgrounds, Construction, Safety Equipment, Appliances, and Control Panels

Per Bag	ACT Part Number	Color & Material	Length Inch/mm	Width Inch/mm	Thickness Inch/mm	Tie Tensile	Diameter Inch/mm	Bulk Bag	Per Case
100	AL-07-50-LP-9-C	Natural Nylon	7.5/190.5	.177/4.495	.053/1.346	50 lb.	1.75/44.45	1,000	10,000
100	AL-07-50-LP-0-C	UV Black Nylon	7.5/190.5	.177/4.495	.053/1.346	50 lb.	1.75/44.45	1,000	10,000
100	AL-11-50-LP-9-C	Natural Nylon	11.3/288.2	.177/4.495	.053/1.346	50 lb.	3.06/77.78		5,000
100	AL-11-50-LP-0-C	UV Black Nylon	11.3/288.2	.177/4.495	.053/1.346	50 lb.	3.06/77.78		5,000
100	AL-14-50-LP-9-C	Natural Nylon	14.6/372.1	.177/4.495	.053/1.346	50 lb.	4.06/103.18		5,000
100	AL-14-50-LP-0-C	UV Black Nylon	14.6/372.1	.177/4.495	.053/1.346	50 lb.	4.06/103.18		5,000
100	AL-14-120-LP-9-C	Natural Nylon	16.0/406.4	.300/7.620	.075/1.905	120 lb.	4.06/103.18		2,000
100	AL-14-120-LP-0-C	UV Black Nylon	16.0/406.4	.300/7.620	.075/1.905	120 lb.	4.06/103.18		2,000

Mil-Spec MS3367-23, -29, -24, -25 Certified



Contact us for more information or samples:

Advanced Cable Ties, Inc., 245 Suffolk Lane, Gardner, MA 01440 - 800.861.7228 - [www.actfs.com](http://www.actfs.com)